




MODEL FM - 16

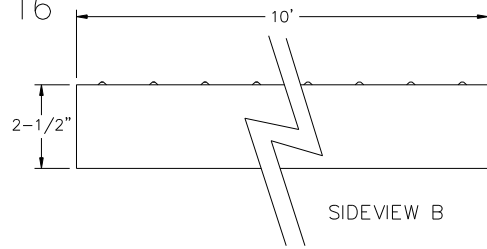

SIDEVIEW B

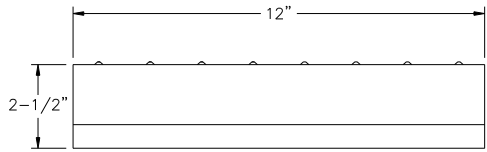


SIDEVIEW A

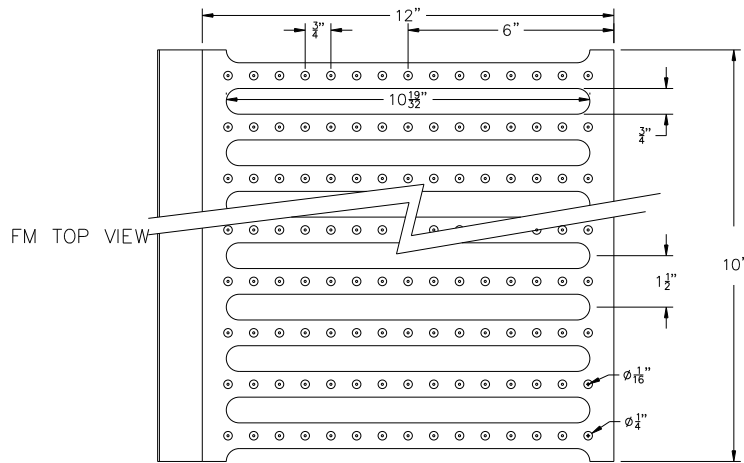


FM TOP VIEW


FM END VIEW

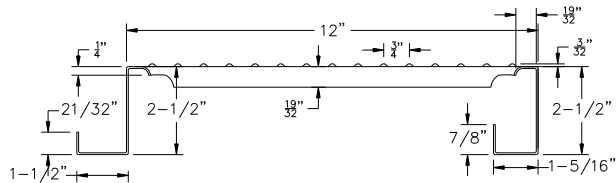

MODEL MM - 16

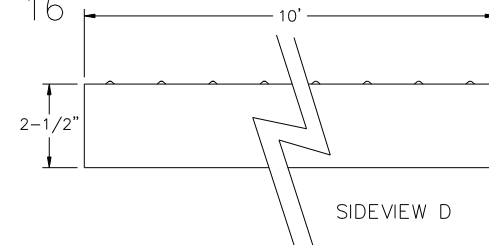


SIDEVIEW D

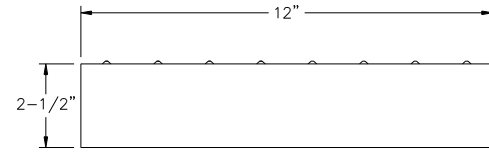


SIDEVIEW C

MM TOP VIEW

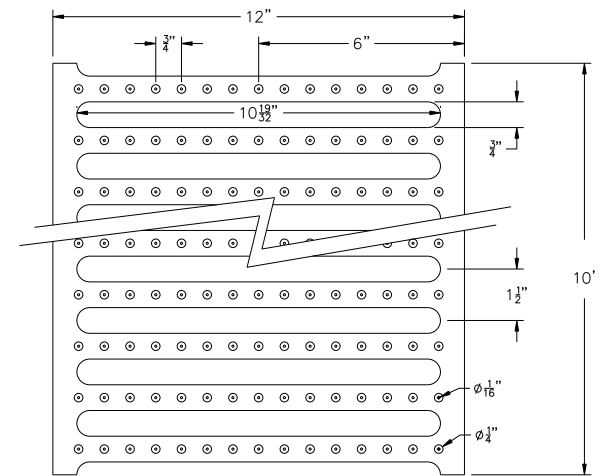

MM END VIEW

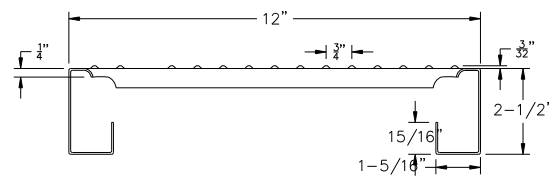

UNRESTRAINED SUPPORTS	4'0"	5'0"	6'0"	7'0"
MAXIMUM CONCENTRATED LOAD	638	595	499	432
DEFLECTION (INCHES)	0.12	0.22	0.31	0.43
MAXIMUM UNIFORM DISTRIBUTED LOAD	370	238	166	123
DEFLECTION (INCHES)	0.17	0.27	0.39	0.54

UNRESTRAINED SUPPORTS	4'0"	5'0"	6'0"	7'0"
MAXIMUM CONCENTRATED LOAD	638	595	499	432
DEFLECTION (INCHES)	0.12	0.22	0.31	0.43
MAXIMUM UNIFORM DISTRIBUTED LOAD	370	238	166	123
DEFLECTION (INCHES)	0.17	0.27	0.39	0.54

R & S SALES COMPANY, INC.
3575 OLD CONEJO ROAD
NEWBURY PARK, CA 91320
PHONE 805-375-3980
FAX 805-375-3981

MODEL FM - 16
HEIGHT x LENGTH 2-1/2" x 120"
MATERIAL A653 G90 GALVANIZED STEEL

MATERIAL WEIGHT 3.7 POUNDS PER LINEAL FOOT
MATERIAL GAUGE 16 GA 0.0575" MINIMUM
DATE 1/4/06

R & S SALES COMPANY, INC.
3575 OLD CONEJO ROAD
NEWBURY PARK, CA 91320
PHONE 805-375-3980
FAX 805-375-3981

MODEL MM - 16
HEIGHT x LENGTH 2-1/2" x 120"
MATERIAL A653 G90 GALVANIZED STEEL

MATERIAL WEIGHT 3.7 POUNDS PER LINEAL FOOT
MATERIAL GAUGE 16 GA 0.0575" MINIMUM
DATE 1/4/06